


F I X E D R E S I L I E N T






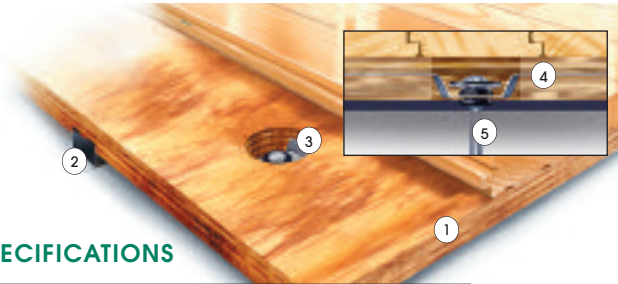

SYSTEM FEATURES AND BENEFITS

A resilient anchored floor system providing a unique subfloor and cushion design that enhances play for athletic activities while engineered for heavy non-athletic loading, consisting in general of a vapor barrier, pre-manufactured subfloor panels, continuous lineal resilient cushioning, anti-squeak clip and pin anchorage, maple flooring, sanding, sealers, finishes, game lines, and wall base.




- ① Pre-assembled subfloor panels
- ② Continuous Focus cushion made with recycled material
- ③ Concrete anchorage pocket
- ④ Integrated anchorage clip
- ⑤ Anchorage pin with anti-squeak collar


SPECIFICATIONS

MANUFACTURING	ISO 9001:2000 CERTIFIED
U.S. PATENT #	7,127,857
SYSTEM TYPE	Fixed Resilient
ANCHORAGE	Sectional Channel (Design Group 2)
SUBFLOOR CONSTRUCTION	Plywood Panel
RESILIENCE	Lineal Pads
	STAGE ONE Reacting to light athletic loads, individual players, young participants.
	STAGE TWO Reacting to heavy athletic loads and multiple participants.
	STAGE THREE Reacting with protective cushion housing and floor system support.
RECYCLED CONTRIBUTION 	Focus Subfloor System includes components with recycled content.
SLAB DEPRESSION	25/32" (20 mm) flooring – 1-3/4" (44 mm) 33/32" (26 mm) flooring – 2" (51 mm)
DIN STATUS 	D·I·N Meets or exceeds all the requirements of DIN 18032, part 2, 2001
TESTING LABORATORY 	United States Sports Surfacing Laboratory
CERTIFIED TESTING 	Laboratory test equipment calibrated and certified through the ISSS.
GREEN STATUS	Managed forests, certification available.

WALL BASE DETAIL

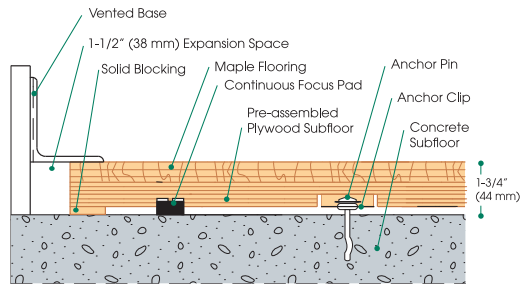

THRESHOLD DETAIL (optional accessory)

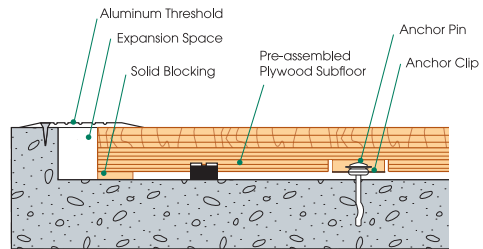

EQUIPMENT DETAIL (optional accessory)

